



STARK

STRONGLY CHOSEN

SINCE 1980

STARK EXCAVATOR SWEEPER EBS



SWEEPING

EFFICIENT BOOM BRUSH FOR PROFESSIONAL USE

- An efficient, versatile and agile brush device for year-round use.
- Perfectly suited for challenging special applications and railway cleaning.
- Strong construction and high-quality components.
- The hydraulic motor is integrated inside the brush roller to protect against impacts.
- The 900 mm slats guarantee a finished work mark even on uneven brushing areas.
- 900 mm EcoLine slats are the most costeffective option.
- Versatile selection (EBS 600 - 2500).



STANDARD EQUIPMENT

- ▶ Quick-release brush roller
- ▶ SUNLINE 900 mm slats
- ▶ Flow control valve
- ▶ Support legs
- ▶ Numerous fitting options
- ▶ Various quick couplings for hydraulics
- ▶ Fender

OPTIONAL EQUIPMENT


- ▶ Flow restrictor valve (must be if the output is more than 120 l/min)
- ▶ Dust binding nozzle hose
- ▶ High pressure irrigation



STARK

www.stark.fi
STARK / Lametal Oy

TECHNICAL DRAWINGS

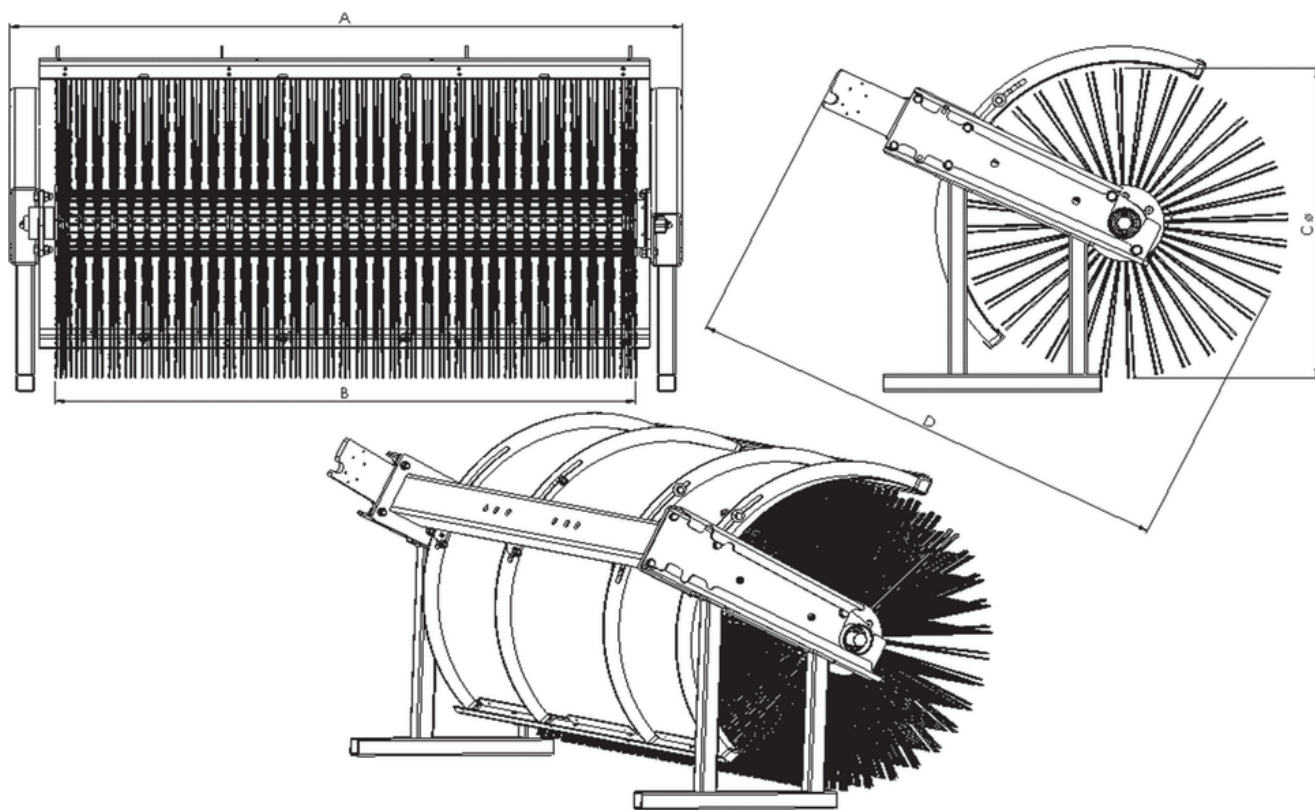

TECHNICAL DIMENSIONS

Product	Max. width (mm)	Working width (mm)	Main brush diameter (mm)	Height (mm)	Min. oil consumption (l/min)	Max. oil yield (l/min)	Max. Pressure (bar)	Max. return line back pressure (bar)	Weight without adapters (kg)*
	A	B	C	D					
EBS 600	900	600	900	1350	55	120	300	150	140
EBS 1000	1220	1000	900	1070	55	120	300	150	175
EBS 1300	1520	1300	900	1070	55	120	300	150	205
EBS 1600	1820	1600	900	1070	55	120	300	150	235
EBS 2000	2220	2000	900	1070	55	120	300	150	275
EBS 2500	2710	2500	900	1070	55	120	300	150	325

* Weight varies depending on the type of attachment / brush equipment.