



STARK

STRONGLY CHOSEN

SINCE 1980

STARK ROTARY SWEEPERS, RSW C-MODELS



SWEEPING

- **Powerful, versatile and agile sweeper for all year use.**
- **The hydraulic motor is integrated inside the brush roll to protect it from impacts.**
- **The RSW rotary sweeper can be customized with many options.**
- 340 mm cassette lamellas, the best option when you need to sweep large amount of material.
- Large 30 degree turning angle allows sweeping close to walls and guardrails.
- 2 x hydraulic motors.
- Vertical (250 mm) and horizontal floating (12") ensure a finished sweeping results on uneven work site.
- A separate turning frame keeps the brush roller straight at all sweeping angles.
- Dampened clutch protects the brush roll hydraulic motor during start-up and collision situations.
- Spring and gas shock absorbers keep the brush roll firmly on surface.
- The bolt-on STARK FIT adapter enables quick attachment between different base machines.



STANDARD EQUIPMENT

- ▶ Brush roll hydraulic turn
- ▶ Vertical and horizontal float in
- ▶ Flow control valve
- ▶ Support legs

OPTIONAL EQUIPMENT


- ▶ High-pressure dust suppression system
- ▶ 12/24 V watering system
- ▶ Dust binding or watering nozzles set
- ▶ Brush roll directional valve



STARK

www.stark.fi
STARK / Lametal Oy

TECHNICAL DRAWINGS

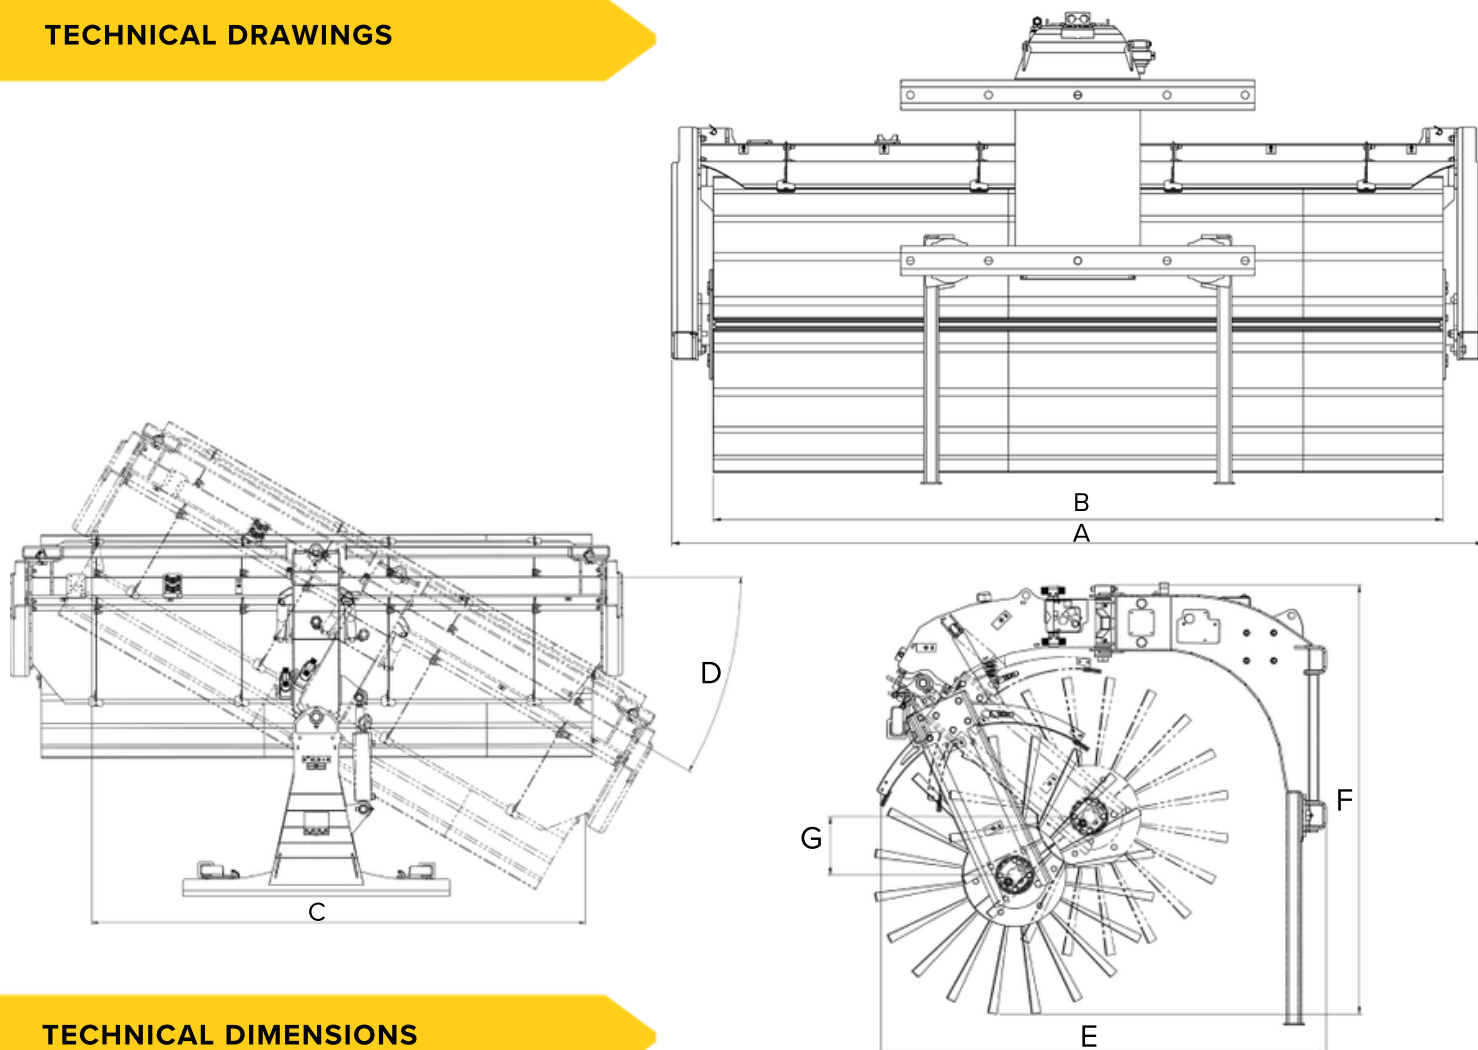

TECHNICAL DIMENSIONS

Product	Max. width (mm)	Working width (mm)	Working width at angle (mm)	Turning angle $\pm(^{\circ})$	Length (mm)	Height (mm)	Max. floating (mm)	Min. oil absorption (l/min)	Max. oil flo (l/min) **	Return line max counterpressure (bar)	Weight (kg)*
	A	B	C	D	E	F	G				
RSW 2500 C	2700	2500	2200	30	1650	1450	250	55	120	120	755
RSW 3000 C	3200	3000	2700	30	1650	1450	250	75	120	120	795
RSW 3500 C	3700	3500	3200	30	1650	1450	250	75	120	120	845

* NOTE! Weight varies depending on the type of attachment / brush equipment.

**Available with a flow restrictor if output exceeds 120 l/min.