



STARK

STRONGLY CHOSEN

SINCE 1980

STARK ROTARY SWEEPERS, RSW S-MODELS



SWEEPING

YEAR-ROUND SWEEPING EQUIPMENT

- **Powerful, versatile and agile sweeper for all-year use.**
- **The hydraulic motor is integrated inside the brush roll to protect it from impacts.**
- **The RSW rotary sweeper can be customized with many options.**
- 900 mm lamellas, vertical (250 mm) and horizontal floating (12°) ensure a finished sweeping results on unsteady work sites.
- Large 30 degree turning angle allows sweeping close to walls and guardrails.
- 900 mm lamellas are the most cost-effective option.
- A separate turning frame keeps the brush roller straight at all sweeping angles.
- Dampened clutch protects the brush roll hydraulic motor during start-up and collision situations.
- Spring and gas shock absorbers keep the brush roll firmly on surface.
- The bolt-on STARK FIT adapter enables quick attachment between different base machines.



STANDARD EQUIPMENT

- ▶ Hydraulic brush plate adjustment 900 mm
- ▶ 2-pronged SAJAS blades
- ▶ STARK FIT adapters
- ▶ 2- or 4-hose hydraulics

OPTIONAL EQUIPMENT


- ▶ High-pressure dust suppression system
- ▶ 12/24 V watering system
- ▶ Dust binding or watering nozzles set
- ▶ Brush roll directional valve



STARK

www.stark.fi
STARK / Lametal Oy

TECHNICAL DRAWINGS

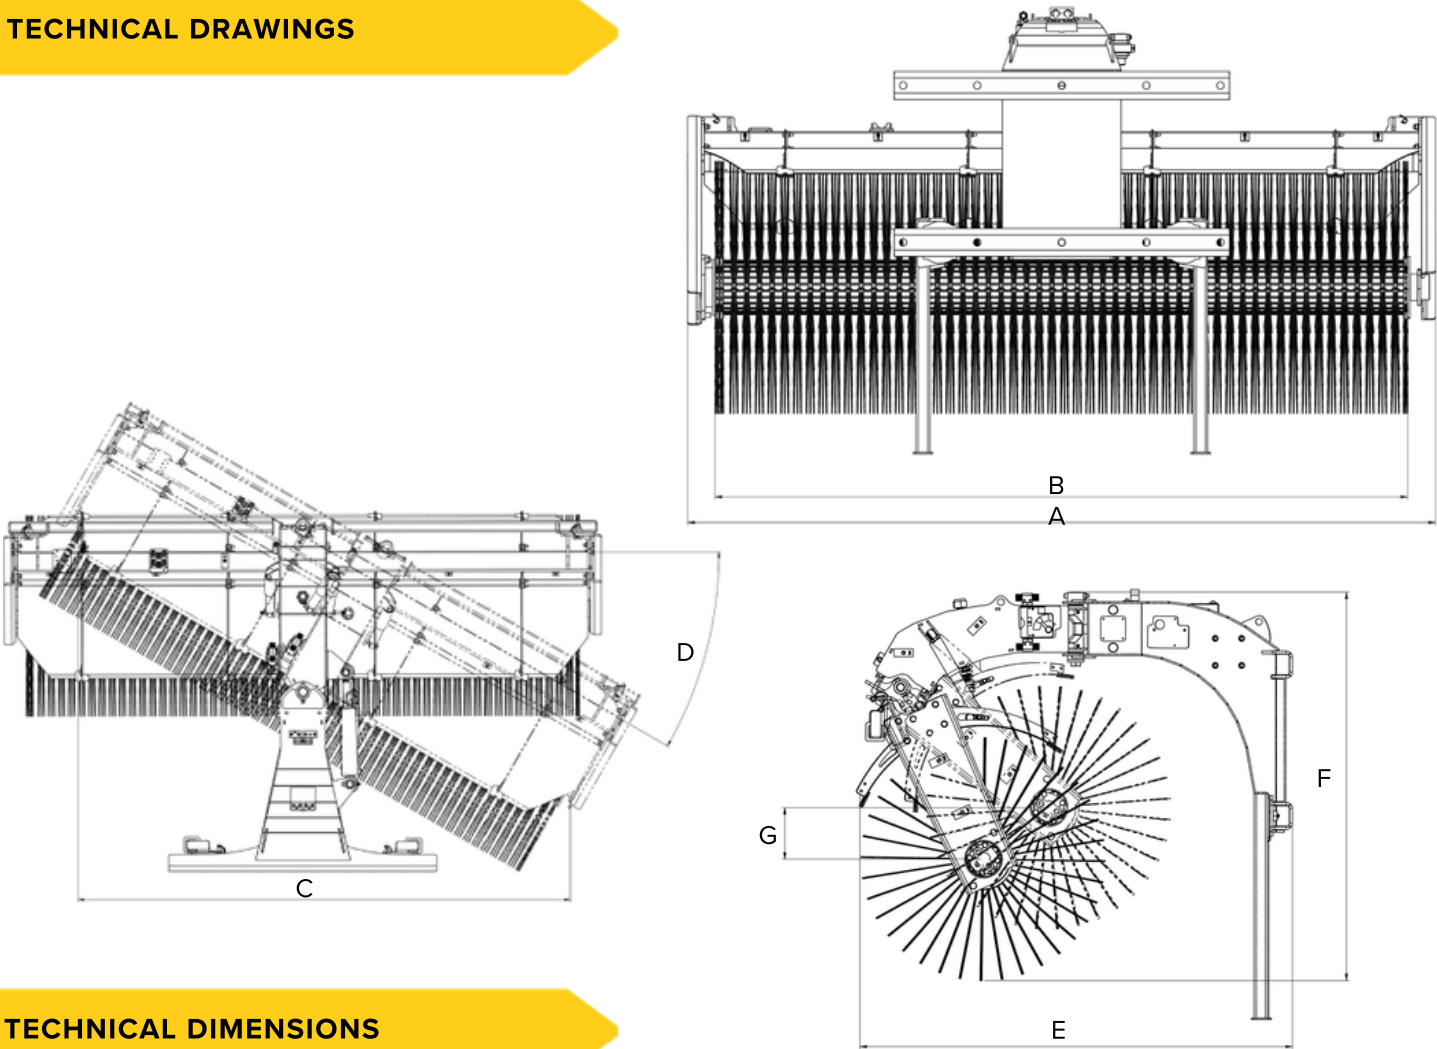

TECHNICAL DIMENSIONS

Product	Max. width (mm)	Working width (mm)	Working width at angle (mm)	Turning angle +/- (°)	Lenght (mm)	Height (mm)	Max. floating (mm)	Min. oil absorbtion (l/min)	Max. oil flow (l/min) **	Return line max counterpressure (bar)	Weight (kg)*
	A	B	C	D	E	F	G				
RSW 2500 S	2700	2500	2200	30	1650	1450	250	40	120	120	580
RSW 3000 S	3200	3000	2700	30	1650	1450	250	40	120	120	620

* NOTE! Weight varies depending on the type of attachment / brush equipment.
**Available with a flow restrictor if output exceeds 120 l/min.